

## MIEN2206

### 6-port 10/100M Din-Rail Layer 2 Unmanaged Industrial Ethernet Switch

#### Product description

MIEN2206-2F Din-rail unmanaged industrial Ethernet switch supports IEEE 802.3/802.3u/802.3x with 10/100M, full/half-duplex, MDI/MDIX self-adaptive RJ45 ports and 100Base-F(X) ports. MIEN2206 series can be operated at wide temperatures range from -40 to 85°C, and its IP40 casing house satisfies any harsh industrial environment.



#### Features:

- 2x100M FX ports + 4x10/100M RJ45 ports
- Start working once connected, quick and convenient
- Support 10Base-T/100Base-TX self-adaptive, full/half duplex, and MDI/MDIX self-adaptive mode
- IP40 rated casing house with fanless thermal design
- Support power-down status relay alarm output
- Support status display indicator lights
- Industrial grade power supply with anti-reverse/overcurrent/overvoltage/EMC protection
- Wide temperature range from -40 to 85°C
- Satisfy harsh industrial environment

## Product specification

### Technical Parameters

Protocol Standard	IEEE802.3, IEEE802.3u(100Base-TX&100Base-FX), IEEE802.3x(Flow control)
-------------------	--

### Switch Capability

MAC Table Size	1k
Switch Latency	<5 $\mu$ s
Storage and Forward rate	1.19Mpps
Switch Bandwidth	1.2Gbps

### Interface

100M port	Number: 6
	Connector: 1 $\times$ 9 fixed fiber port(single/multi-mode optional, SC/FC/ST interface) or RJ45 100M TX port
	Baud rate: 100Base-FX(Fiber port), auto-negotiation 10/100Base-TX
Terminal block for power input	5.08mm terminal block
Terminal block for relay alarm	5.08mm terminal block, 1A@24VDC

### Communication Distance

Twisted-pair	100m(CAT5/CAT5e cable)
Multi-mode fiber	100M multi-mode: 1310nm, 2km
Single mode fiber	100M single mode: 1310nm, 20/40km; 1550nm, 60/80/100km

### LED Indicator Lights

Front panel LED lights	Port light: LINK/ACT; SPEED
	System work light: RUN
	Power status light: PWR1; PWR2

### Power


Input power	DC9-60V AD220V
Power consumption	<2.5W(max)
Overload protection	support
Inversed protection	support
Redundancy protection	support

### Working Environment

Operating temperature	-40 $^{\circ}$ C~85 $^{\circ}$ C
Storage temperature	-40 $^{\circ}$ C~85 $^{\circ}$ C

Ambient humidity	5%~95%
<b>Physical Characteristics</b>	
Shell	IP40 protection, aluminum alloy shell
Installation	Standard 35mm DIN-rail Mounting
Dimension	140mm*35mm*100mm
<b>Industry Standard</b>	
EMC	EN61000-4-2(ESD), Level 4 EN61000-4-3(RS), Level 4 EN61000-4-4(EFT), Level 4 EN61000-4-5(Surge), Level 4 EN61000-4-6(CS), Level 4 EN61000-4-8, Level 5
Impact	IEC60068-2-27
Falling	IEC60068-2-32
Shock	IEC60068-2-6
<b>Warranty</b>	
Warranty	5 Years
Certification	CE, FCC, RoHS

## Dimensional drawing

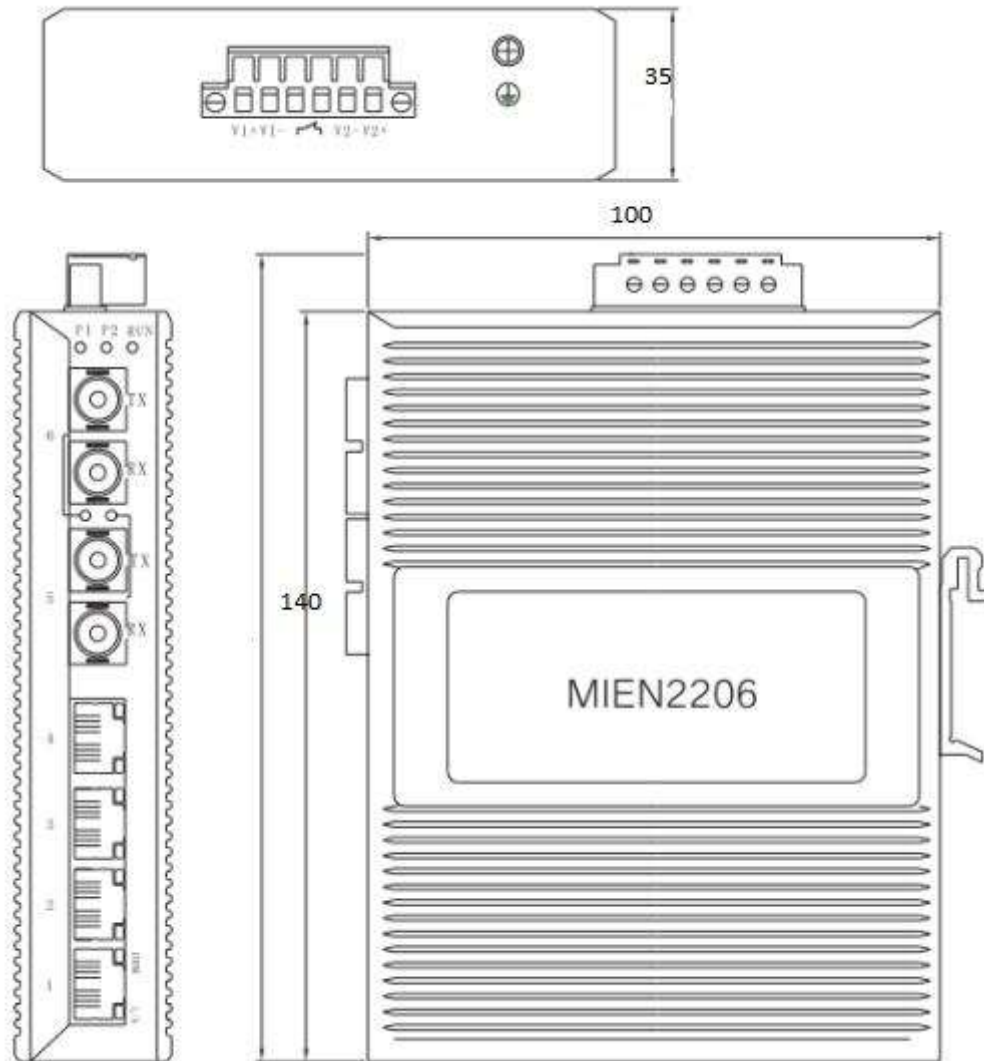

Din-rail mounting (unit: mm)

## Ordering information

MIEN2206-2M-SC02	2x100M fiber ports +4x10/100M RJ45 ports, redundant DC9-60V power supply, Multi-mode, SC connector, 2KM
MIEN2206-2M-ST02	2x100M fiber ports +4x10/100M RJ45 ports, redundant DC9-60V power supply, Multi-mode, ST connector, 2KM
MIEN2206-2M-FC02	2x100M fiber ports +4x10/100M RJ45 ports, redundant DC9-60V power supply, Multi-mode, FC connector, 2KM
MIEN2206-2S-SC20	2x100M fiber ports +4x10/100M RJ45 ports, redundant DC9-60V power supply, Single-mode, SC connector, 20KM
MIEN2206-2S-ST20	2x100M fiber ports +4x10/100M RJ45 ports, redundant DC9-60V power supply, Single-mode, ST connector, 20KM
MIEN2206-2S-FC20	2x100M fiber ports +4x10/100M RJ45 ports, redundant DC9-60V power

	supply,Single-mode,FC connector, 20KM
MIEN2206-2M-SC02-AD220	2x100M fiber ports +4x10/100M RJ45 ports, AC85-264V/DC110~370V isolated power supply,Multi-mode,SC connector, 2KM
MIEN2206-2M-ST02-AD220	2x100M fiber ports +4x10/100M RJ45 ports,AC85-264V/DC110~370V isolated power supply,Multi-mode,ST connector, 2KM
MIEN2206-2M-FC02-AD220	2x100M fiber ports +4x10/100M RJ45 ports, AC85-264V/DC110~370V isolated power supply,Multi-mode,FC connector, 2KM
MIEN2206-2S-SC20-AD220	2x100M fiber ports +4x10/100M RJ45 ports, AC85-264V/DC110~370V isolated power supply,Single-mode,SC connector, 20KM
MIEN2206-2S-ST20-AD220	2x100M fiber ports +4x10/100M RJ45 ports, AC85-264V/DC110~370V isolated power supply,Single-mode,ST connector, 20KM
MIEN2206-2S-FC20-AD220	2x100M fiber ports +4x10/100M RJ45 ports, AC85-264V/DC110~370V isolated power supply,Single-mode,FC connector, 20KM